




DEAD AND ADJUSTABLE LATCH BOLT 3 LOCKING POINTS

Latch bolt interchangeable with roller bolt cod. 01435

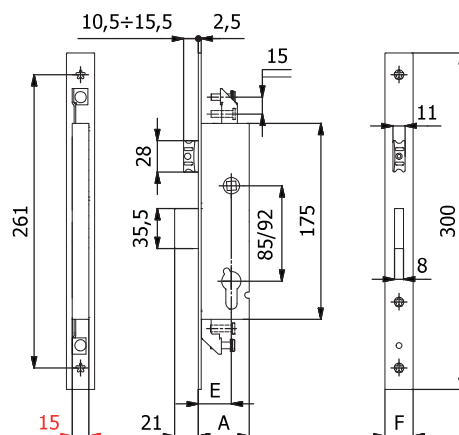

CONSTRUCTIVE FEATURES:

Zinc and plastic plated steel case and cover - Stainless steel forend - Nickel-plated special alloy self-centering dead bolt with lock-picking system - Nickel-plated special alloy anti-noise latch bolt - Zinc-plated special alloy square spindle device $\varnothing$ 8 mm.

WORKING:

Key driven dead bolt - Handle or key driven latch bolt.

HAND:

Reversible.

PROVIDED WITH:

2 roses cod. 0120 N, forend spacer cod. 0623 N (forend 25 mm) or 2 cod. 0625 N (forend 22 mm), cylinder screw, stainless steel fixing screws, assembling instructions.

COD.	E	F	A	Centre distance	Throws	kg		
1610S.25.16	25	16	41	85	2	0,62	1	5
1610S.25.22	25	22	41	85	2	0,68	1	5
1610S.25.25	25	25	41	85	2	0,70	1	5
1610S.30.16	30	16	46	85	2	0,66	1	5
1610S.30.22	30	22	46	85	2	0,72	1	5
1610S.30.25	30	25	46	85	2	0,74	1	5
1610S.35.16	35	16	51	85	2	0,70	1	5
1610S.35.22	35	22	51	85	2	0,76	1	5
1610S.35.25	35	25	51	85	2	0,78	1	5
1610S.40.16	40	16	56	85	2	0,74	1	5
1610S.40.22	40	22	56	85	2	0,80	1	5
1610S.40.25	40	25	56	85	2	0,82	1	5
1630S.**.**	-	-	-	92	-	-	-	-